
FICHA TÉCNICA

# DISCOS DE LIJA

## RESPALDO VELCRO 5” x 8 perforaciones



- Discos con baja generación de calor y resistentes a la humedad gracias a su doble liga de resina.
- Respaldo resistente al deslaminado y al rasgado.
- Excelente acabado y terminación.
- Capa de distribución granular abierta combinada con capa de estearato de calcio permite que el abrasivo no se sature y extiende la duración del producto.
- Lija de gran versatilidad y múltiples aplicaciones.

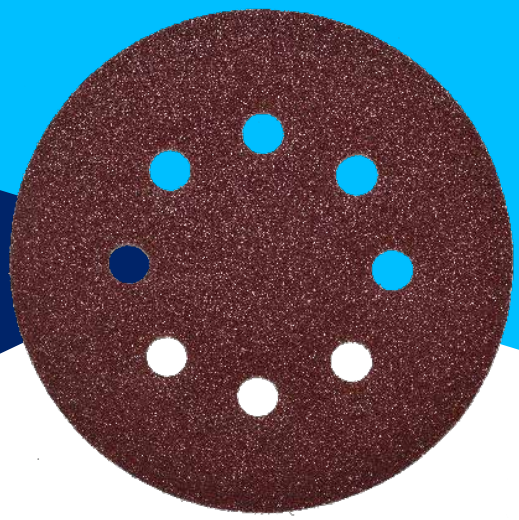


| DISCOS DE LIJA RESPALDO VELCRO 5” x 8 PERF. | |
|---|---|
| Propiedades: | Grano Óxido de Aluminio |
| Uso en: | Madera, eliminación de pintura, barniz, materiales de retape y más. |
| Marca: | Nexxo |
| Formato: | 125 mm con respiración 8 orificios |
| Empaque: | Set de 5 unidades |

| CÓDIGO | DESCRIPCIÓN | EMPAQUE |
|---|---|---|
| **21DLVG040CA** | SET (5) DL Velcro 125mm gr.40 | 5 unds. |
| **21DLVG060CA** | SET (5) DL Velcro 125mm gr.60 | 5 unds. |
| **21DLVG080CA** | SET (5) DL Velcro 125mm gr.80 | 5 unds. |
| **21DLVG100CA** | SET (5) DL Velcro 125mm gr.100 | 5 unds. |
| **21DLVG120CA** | SET (5) DL Velcro 125mm gr.120 | 5 unds. |
| **21DLVG180CA** | SET (5) DL Velcro 125mm gr.180 | 5 unds. |
| **21DLVG220CA** | SET (5) DL Velcro 125mm gr.220 | 5 unds. |
| **21DLVG320CA** | SET (5) DL Velcro 125mm gr.320 | 5 unds. |

CHRISTENSEN COMERCIAL S.A.
Lo Campino 432 - Quilicura - Santiago
Fono: 2 2620 7812
www.chrisco.cl

Elementos de seguridad obligatorios