

SM-308L

2019.09



❖ Specification

AWS A5.9 ER308L

JIS Z3321 YS308L

❖ Applications

MIG welding of low carbon 18% Cr- 8% Ni steel for chemical industries such as oil, medical ,fertilizer and textile industries and for nuclear reactors.

❖ Characteristics on Usage

SM-308L is an austenitic type stainless steel wire , the weld metal contains ferrite and crack sensitivity is extremely good. The Usability, such as arc stability and assimilability of welds to base metal is extremely excellent. Resistance to corrosion and mechanical properties of weld metal are great.

❖ Note on Usage

Use 100% Ar or Ar + 2%O₂ gas.


❖ Packing

Dia.	0.9mm (0.035in)	1.2mm (0.045in)
Spool	12.5kg (28lbs)	



Mechanical Properties & Chemical Composition of All Weld Metal

❖ Welding Conditions

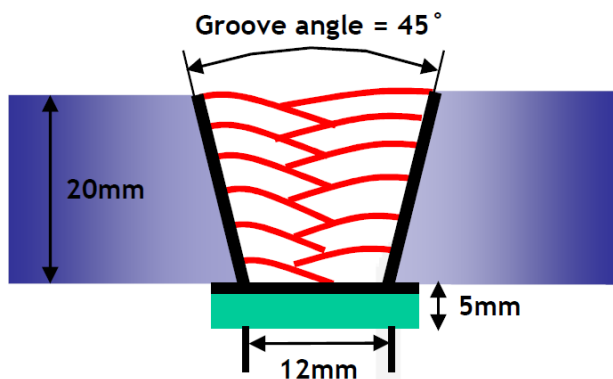

[Joint Preparation & Layer Details]

Diameter(mm)	: 1.2mm
Shielding Gas	: Ar + 2%O ₂
Flow Rate(ℓ /min.)	: 15~20
Amp./ Volt.	: 230/27
Stick-Out(mm)	: 20
Pre-Heat(℃)	: R.T.
Interpass Temp.(℃)	: 150 ± 15
Polarity	: DC(+)

❖ Mechanical Properties of All weld metal

Consumable	Tensile Test		CVN Impact test Joule (ft·lbs)	
	T.S. MPA (ksi)	EL. (%)	0℃ (32°F)	-196℃ (-320.8°F)
SM-308L	560 (81.2)	42.4	81.0 (59.7)	39.6 (29.2)

❖ Chemical Analysis of the wire(wt%)

Consumable	Chemical Composition (%)								
	C	Si	Mn	P	S	Ni	Cr	Mo	Cu
SM-308L	0.019	0.38	1.95	0.025	0.013	9.82	20.4	0.17	0.16
AWS A5.9 ER308L	≤0.03	0.30~ 0.65	1.0~ 2.5	≤0.03	≤0.03	9.0~ 11.0	19.5~ 22.0	≤0.75	≤0.75



Mechanical Properties & Chemical Composition of All Weld Metal

❖δ – Ferrite No.

Consumable	Shielding Gas	Diagram			FERITSCOPE MP-30 * (FISCHER)
		Schaeffler	DeLong	WRC(1992)	
SM-308L	Ar+ 2% O ₂	10.4	13.6	14.7	13.5



SM-309L



❖ Specification

AWS A5.9 ER309L

JIS Z3321 YS309L

❖ Applications

MIG welding of low carbon 22% Cr– 12% Ni steel, heat resistance cast Steel clad of 18% Cr– 8% Ni clad steel and stainless steel to Cr–Mo steel or carbon steel.

❖ Characteristics on Usage

As the weld metal contains ferrite, its resistance to crack is good
Due to its high level of alloy, it has excellent heat resistance

❖ Note on Usage

Use 100% Ar or Ar + 2%O₂ gas.


❖ Packing

Dia.	0.9mm (0.035in)	1.2mm (0.045in)
Spool	12.5kg (28lbs)	

**SM-309L**

Mechanical Properties & Chemical Composition of All Weld Metal

❖ Welding Conditions

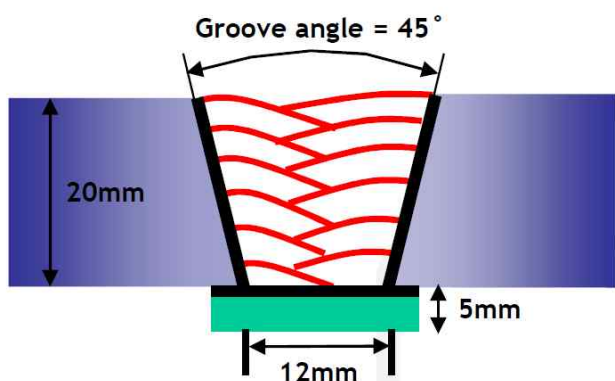

[Joint Preparation & Layer Details]

Diameter(mm)	: 1.2mm
Shielding Gas	: Ar + 2%O ₂
Flow Rate(ℓ /min.)	: 15~20
Amp./ Volt.	: 230/27
Stick-Out(mm)	: 20
Pre-Heat(℃)	: R.T.
Interpass Temp.(℃)	: 150 ± 15
Polarity	: DC(+)

❖ Mechanical Properties of All weld metal

Consumable	Tensile Test		CVN Impact test Joule (ft·lbs)	
	T.S. MPA (ksi)	EL. (%)	-60℃ (-76°F)	-196℃ (-320.8°F)
SM-309L	551~575 (80~83)	41.0~46.4	96.3~103.0 (71.0~76.0)	30.6~40.3 (22.6~29.7)

❖ Chemical Analysis of the wire(wt%)

Consumable	Shielding Gas	Chemical Composition (%)								
		C	Si	Mn	P	S	Ni	Cr	Mo	Cu
SM-309L	Ar+ 2%O ₂	0.016	0.46	1.61	0.016	0.005	13.70	23.2	0.12	0.07
AWS A5.9 ER309L		≤0.03	0.30~ 0.65	1.0~ 2.5	≤0.03	≤0.03	12.0~ 14.0	23.0~ 25.0	≤0.75	≤0.75

This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of HYUNDAI WELDING CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.




SM-309L

Mechanical Properties & Chemical Composition of All Weld Metal

❖ δ – Ferrite No.

Consumable	Shielding Gas	Diagram			FERITSCOPE MP-30 * (FISCHER)
		Schaeffler	Delong	WRC(1992)	
SM-309L	Ar+ 2% O ₂	7.0	13.0	10.4	8.5

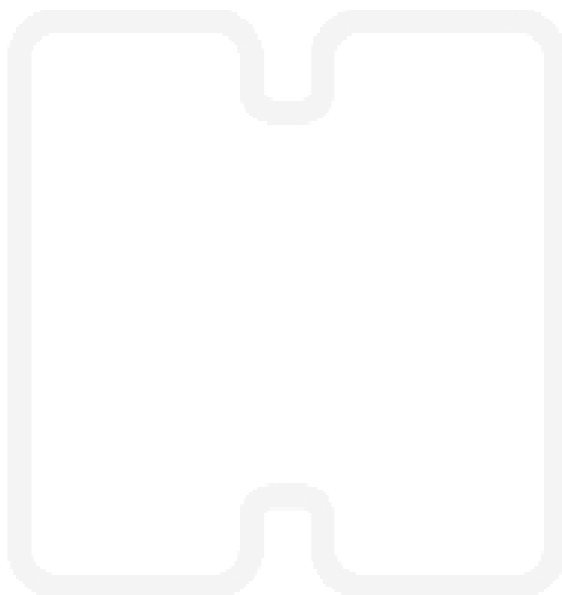

This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of HYUNDAI WELDING CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.

SM-316L



❖ Specification

AWS A5.9 ER316L

JIS Z3321 YS316L

❖ Applications

MIG welding of low carbon 18% Cr– 12% Ni – 2% Mo steel for Chemical industries and nuclear reactors.

❖ Characteristics on Usage

SM-316L is an austenitic type stainless steel wire , the weld metal contains ferrite and crack sensitivity is extremely good. The Usability, such as arc stability and assimilability of welds to base metal is extremely excellent. Resistance to corrosion and mechanical properties of weld metal are great.

❖ Note on Usage

Use 100% Ar or Ar + 2~5% O₂ gas.


❖ Packing

Dia.	0.8mm (0.033in)	0.9mm (0.035in)	1.0mm (0.040in)	1.2mm (0.045in)
Spool	12.5kg, 15kg (28lbs, 33lbs)			

**SM-316L**

Mechanical Properties & Chemical Composition of All Weld Metal

❖ Welding Conditions

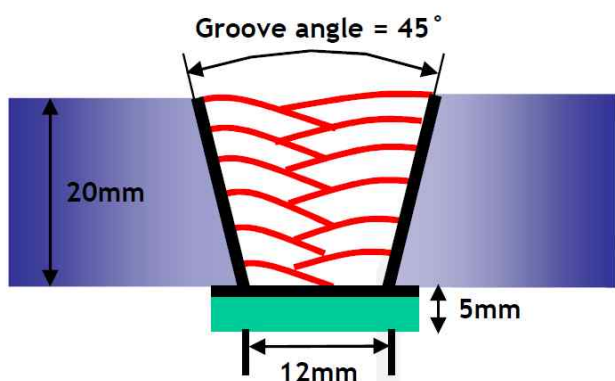

[Joint Preparation & Layer Details]

Diameter(mm)	: 1.2mm
Shielding Gas	: Ar + 2%O ₂
Flow Rate(ℓ /min.)	: 15~20
Amp./ Volt.	: 230/27
Stick-Out(mm)	: 20
Pre-Heat(℃)	: R.T.
Interpass Temp.(℃)	: 150 ± 15
Polarity	: DC(+)

❖ Mechanical Properties of All weld metal

Consumable	Tensile Test		CVN Impact test Joule (ft·lbs)	
	T.S. MPA (lbs/in ²)	EL. (%)	0℃ (32°F)	-196℃ (-320.8°F)
SM-316L	546~567 (79,191~82,237)	38.2~48.0	84.6~125.0 (62.4~92.2)	33.6~65.0 (24.8~47.9)

❖ Chemical Analysis of the wire(wt%)

Consumable	Shielding Gas	Chemical Composition (%)								
		C	Si	Mn	P	S	Ni	Cr	Mo	Cu
SM-316L	Ar+ 2% O ₂	0.017	0.46	1.75	0.021	0.010	11.5	18.5	2.17	0.12
AWS A5.9 ER316L		≤0.03	0.30~ 0.65	1.0~ 2.5	≤0.03	≤0.03	11.0~ 14.0	28.0~ 20.0	2.0~ 3.0	≤0.75

This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of HYUNDAI WELDING CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.




SM-316L

Mechanical Properties & Chemical Composition of All Weld Metal

❖ δ – Ferrite No.

Consumable	Shielding Gas	Diagram			FERITSCOPE MP-30 * (FISCHER)
		Schaeffler	Delong	WRC(1992)	
SM-316L	Ar+ 2% O ₂	8.5	12.7	10.9	14.0

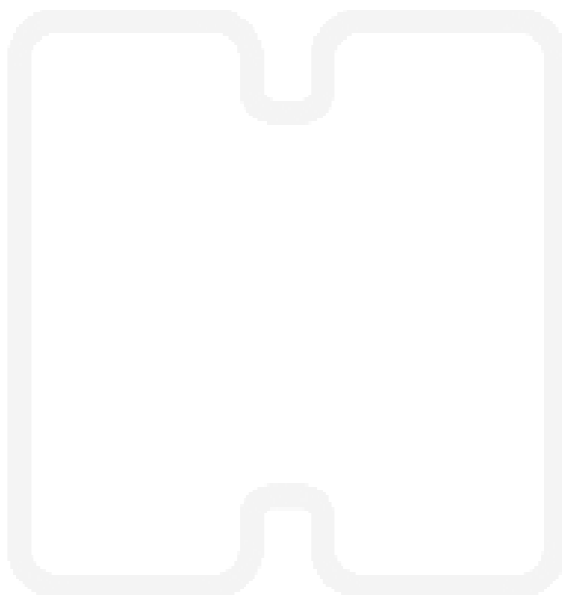

This information is provided solely for the purpose of confirming product conformance with applicable standards. The serviceability of a product or structure utilizing this type of information is and must be the sole responsibility of the builder/user. Many variables beyond the control of HYUNDAI WELDING CO., LTD. affect the results obtained in applying this type of information. These variables include, but are not limited to, welding procedure, shielding gas, plate chemistry and temperature, weldment design, fabrication methods and service requirements.